



Job Name _____

Item # _____

FOOD SERVICE EQUIPMENT

Spec Sheet No. TR-10

Sealed Well

- SW-2E-120
- SW-3E-120
- SW-4E-120
- SW-5E-208/240
- SW-2E-208/240
- SW-3E-208/240
- SW-4E-208/240
- SW-5E-208/240

Upgrade Options:

- Thermostatic Controls-Add suffix -T
- Manifold drains - Add suffix -M
- Thermostatic controls & Manifold drains - Add suffix-MT
- Portable - Add Prefix P to model #

Accessories:

- Stationary Tubular Tray Rail - Models TTR-(2-5)
- Drop-Down Tubular Tray Rail - Models TTR-(2-5)D
- Solid Tray Shelf - Models TTS-(2-5)
- 12" Wide Double Tier Overshelf-TOS-(2-5)
- 18" Wide Double Tier Overshelf-TOS-(2-5)-18
- 12" Wide Single Tier Overshelf-STOS-(2-5)
- 18" Wide Single Tier Overshelf-STOS-(2-5)-18
- Buffet Shelf - Models TBS-(2-5)
- Serving Shelf - Models TSS-(2-5)
- Dish Shelf Add-On(mount under tray shelf)- Models TDS-(2-5)



SW-5E-208 / 240 Shown

Specifications

TOP: 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062")

BODY: 22 gauge #430 stainless steel.

LEGS: 18 gauge stainless steel with fully adjustable non-marking tip.

UNDERSHELF: 22 gauge #430 stainless steel.

LINING: 20 Gauge stainless steel deep drawn with drain.

CUTTING BOARD: 8" wide and 1" thick white thermoplastic.

CUTTING BOARD BRACKETS: 16 gauge #302 stainless steel.

Features

Drains with gate valves per well

6' electrical cord with plug

Infinite control knobs

Indicator lights

Single phase wiring

640 Watt elements (120 volt)

1100 Watt elements (208/240 volt)

Fiberglass insulation between each compartment





Freight Class 85




Supreme Metal

3125 Trotters Parkway
Alpharetta, GA 30004
www.suprememetal.com

Toll Free: 800-645-2526
770-740-6000
Fax: 770-740-6010

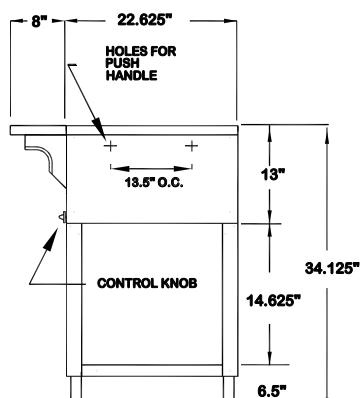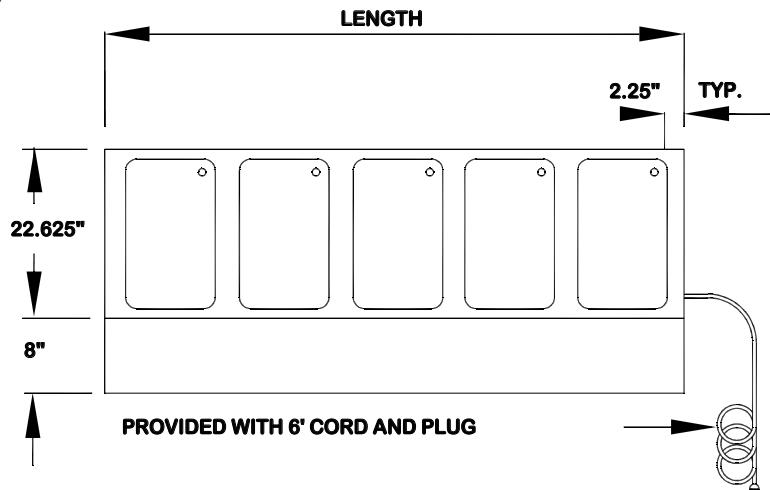

SECTIONAL VIEW

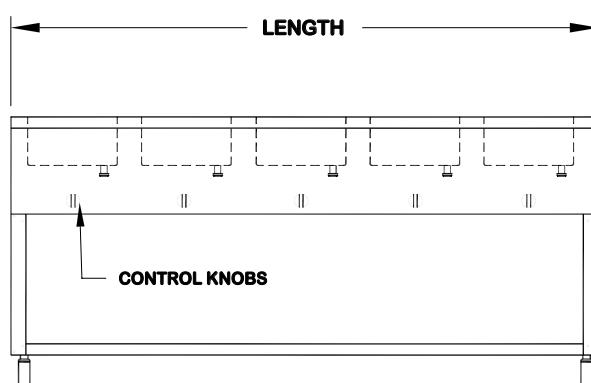

ELEVATION VIEW

Model #	Length	# of Wells	Weight	Cubic Feet	NEMA Plug	True Amp Draw / Watts per Unit
SW-2E-120	A = 31- ¹³ / ₁₆ "	2	92	28.1	5-20P	10.67 / 1280
SW-3E-120	B = 47 1/8"	3	120	41.32	5-20P	16 / 1920
SW-4E-120	C = 62 7/16"	4	152	54.55	L5-30P	21.33 / 2560
SW-2E-208/240	A = 31- ¹³ / ₁₆ "	2	92	28.1	6-20P	9.17 / 2200
SW-3E-208/240	B = 47 1/8"	3	120	41.32	6-20P	13.75 / 3300
SW-4E-208/240	C = 62 7/16"	4	152	54.55	L6-30P	18.33 / 4400
SW-5E-208/240	D = 77 3/4"	5	170	66.94	L6-30P	22.92 / 5500



NEMA PLUG 5-20P



NEMA PLUG 6-20P



NEMA PLUG L5-30P



NEMA PLUG L6-30P

We reserve the right to modify specifications in line with our policy of continuous product improvement.

© Supreme Metal 2009.

Supreme Metal