

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

| Project :       |      |  |
|-----------------|------|--|
| Model #:        |      |  |
| Item #:         | Qty: |  |
| Available W/H : |      |  |
| Approval:       |      |  |

# Solid Door Refrigerator

Reach-In Bottom Mount Super Deluxe Series

**Model: TSR-35SD** 

#### \_\_\_ FEATURES & BENEFITS =\_\_

## Digital temperature control system

Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.

#### High-tech monitor

The unit will beep if the door has been opened for more than 30 seconds. The monitor digitally displays the present temperature and current status of the refrigerator. You can easily change the temperature by adjusting the thermostat.

#### Stainless steel cabinet construction

The Turbo Air Super Deluxe model boasts a stainless steel interior and exterior (galvanized steel top, bottom and back). It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury. The Super Deluxe can add a touch of style to the most refined setting.

#### Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air Super Deluxe series uniquely provides stainless steel shelving.

#### Turbo Cooling feature for faster chilling

The Turbo Cooling function, located on the control panel, allows the compressor to run continuously for up to two hours. When this function is activated, the temperature inside the cabinet quickly decreases and cools drinks, food, and other products much faster. An ideal time to use the Turbo Cooling function is when the unit is stocked with new products.

#### LED interior lighting system

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing

#### Door pressure release device

Pressure relief doors are designed to eliminates vacuum pressure and allows easy, instant door opening.

#### ■ Efficient refrigeration system

Turbo Air's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### Automatic evaporator fan motor delays

When the door is opened the evaporator fan will stop, preventing the circulation of hot and moist air from escaping into the refrigerator. This increases energy efficiency and lengthens the life of the compressor.

#### Bottom mount compressor units

Turbo Air's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.





Refrigerator holds 33°F ~ 38°F for the best in food preservation













| Model    | Swing<br>Door | CU./FT. | #of<br>Shelves | НР  | AMPS | Crated<br>Weight (lbs.) | L x D x H* (inches)   |
|----------|---------------|---------|----------------|-----|------|-------------------------|-----------------------|
| TSR-35SD | 2             | 35      | 6              | 1/3 | 9    | 357                     | 391/2 x 303/8 x 781/4 |

(unit: inch)

# Solid Door Refrigerator

### **Model: TSR-35SD**

| ELECTRICAL DATA          |                |  |  |  |  |
|--------------------------|----------------|--|--|--|--|
| Voltage                  | 115/60/1       |  |  |  |  |
| Plug Type                |                |  |  |  |  |
| Full Load Amperes        | 9              |  |  |  |  |
| Compressor HP            | 1/3            |  |  |  |  |
| Feed Wires with Ground   | 3              |  |  |  |  |
| Cord Length ft.          | 9              |  |  |  |  |
| Refrigerant              | R-134A         |  |  |  |  |
| DIMENSIONAL DATA         |                |  |  |  |  |
| # of Doors               | 2              |  |  |  |  |
| # of Racks Accepted      | -              |  |  |  |  |
| Net Capacity cu. ft.     | 35             |  |  |  |  |
| Ext. Length Overall in.  | 391/2 (1003mm) |  |  |  |  |
| Ext. Depth Overall in.   | 303/8 (770mm)  |  |  |  |  |
| Ext. Height Overall in.* | 781/4 (1987mm) |  |  |  |  |
| Int. Length Overall in.  | 351/2 (903mm)  |  |  |  |  |
| Int. Depth Overall in.   | 261/4 (666mm)  |  |  |  |  |
| Int. Height Overall in.  | 603/8 (1534mm) |  |  |  |  |
| Gross Weight lbs.        | 357            |  |  |  |  |
| # of Shelves             | 6              |  |  |  |  |
| Shelf Size (LxD) in.     | 171/4 x 231/4  |  |  |  |  |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Height does not include 5" caster height or 6" optional legs.


#### 3 Year Parts and Labor Warranty **Additional 2 Year Warranty on Compressor**


- Door locks standard
- Positive seal self-closing doors
- Easy replaceable one piece magnetic door gaskets
- Self-contained system
- Standard 4" swivel casters with locks on the front set
- Solid and sturdy grille design
- Legs available for all models (optional)
- Remote cabinets & condensing units available

#### ■ OPTIONAL ACCESSORIES:

- □ 5" Diameter swivel casters
- ☐ 6" Standard legs
- □ Additional stainless steel shelves
- □ Additional PE coated wire shelves

### **PLAN VIEW**



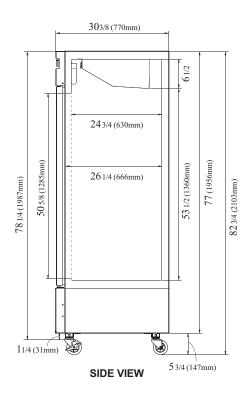

Ver.201501
















■ Warranty: 800-381-7770 ■ AC: 888-900-1002









